


## USER MANUAL


www.ezzzeiek.com

- 1. Specifications
- 2. Chassis Parts
- 3. Control Panel Functions
- 4. 3.5"/2.5" HDD/SSD Installation
- 5. Cooling System Installation
- 6. ARGB Control Modes Switching

Model		
Model Name:	CELESTA 340	
Model Number:	CSAZ-340/ CSAZ-340F	
Specifications		
Type:	ATX Mid Tower	
Color:	Black/Black(interior)	
Side Panel Window:	Left side panel: tempered glass with rubber mounts	
Max CPU Cooler Height:	UP to 165mm	
Max Video Card Length:	Up to 320mm long video card	
Power Supply:	Not included	
Motherboard Compatibility:	<275mm EATX  ATX  Micro ATX  ITX	
Expansion		
External 5.25" Drive Bays:	0	
Internal 2.5" Drive Bays:	Up to 4	
Internal 3.5" Drive Bays:	Up to 2	
Expansion Slots:	7	
Top Ports:	Power button, reset button, led button, HD Audio, USB 3.0 x 1, USB2.0x2	
Physical Specifications		
Case Dimension (HxWxD)	478X210X400mm/18.8X8.3X15.7 inches	
Weight:	6kg /13.2lbs	
Features		
Tempered Glass Sides Window:	High-quality tempered glass side window allows for clear visuals to inner components	
Addressable RGB Light Effects:	Addressable RGB light strip in the front controlled the lighting by the LED button. To synchronize all addressable RGB light devices, it needs to be switched to be controlled only by the motherboard.	
Available Fan Ports:	3x120mm or 3x140mm Fan ports in the front 2x120mm or 2x140mm Fan ports on the top 1x120mm Fan port in the rear	
The available fan included:	CSAZ-340F: Rear - 1 x Black fan CSAZ-340 : Case only.	
Water Cooling:	Supports radiators up to 240mm in the Top Supports radiators up to 280/360mm in the Front	
Dust Filters:	Removable (magnetic) dustproof net on the top, steel dust filter on bottom of chassis.	
Power Supply Support:	t: Bottom mounted ATX Power Supply	

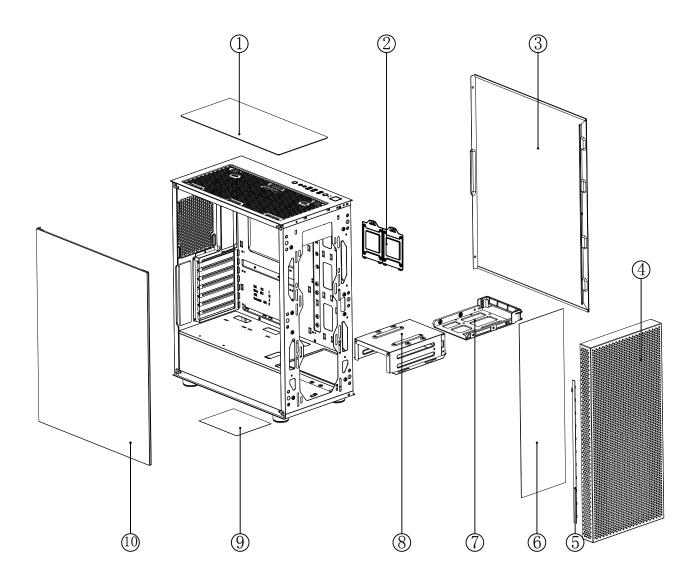


1	Removable (magnetic) dustproof mesh	
2	2.5" SSD metal tray x 2	
3	Right side metal panel	
4	Front panel	
5	ARGB led light strip	
6	Led light guide mesh	
7	Multifunctional hard disk bracket	
8	Multifunctional hard disk cage	
9	Steel dust filter	
10	Sliding tempered glass panel	

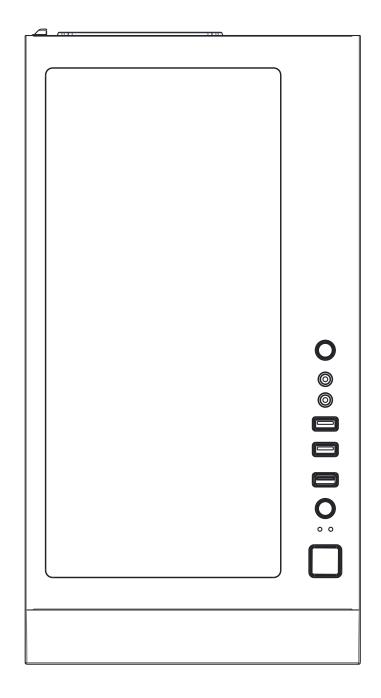


U	POWER
$\bigcirc$	RESET
LED	LED
O	Audio

₹ P	USB 3.0 (Blue)
	USB 2.0 (Black)
0	Mic

## 3.5 "/ 2.5" HDD/SSD Installation

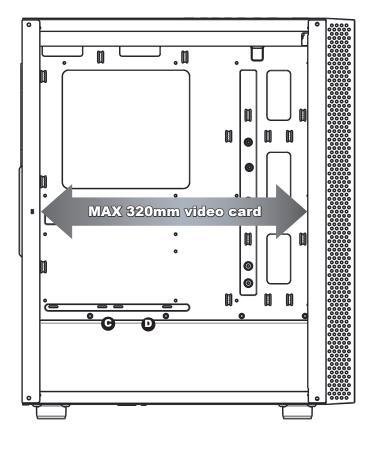

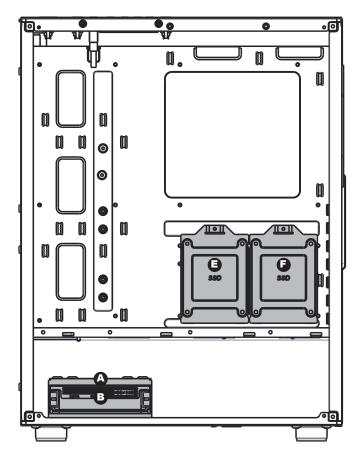

•Supports up to 320mm long video cards.




or




- Multifunctional hard disk bracket support 3.5" HDD or 2.5" SSD x 1 ( 🕒 )
- Multifunctional hard disk cage support
  3.5" HDD or 2.5" SSD x 1( ()

Front

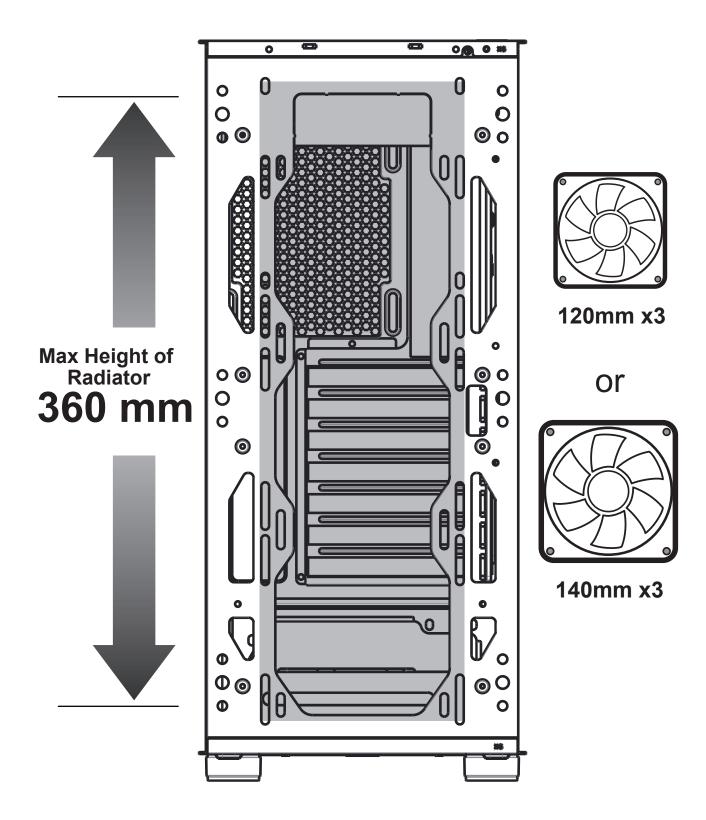



## Rear

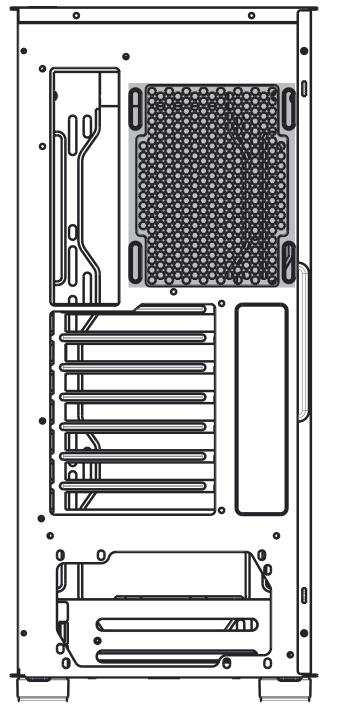




120mm x1

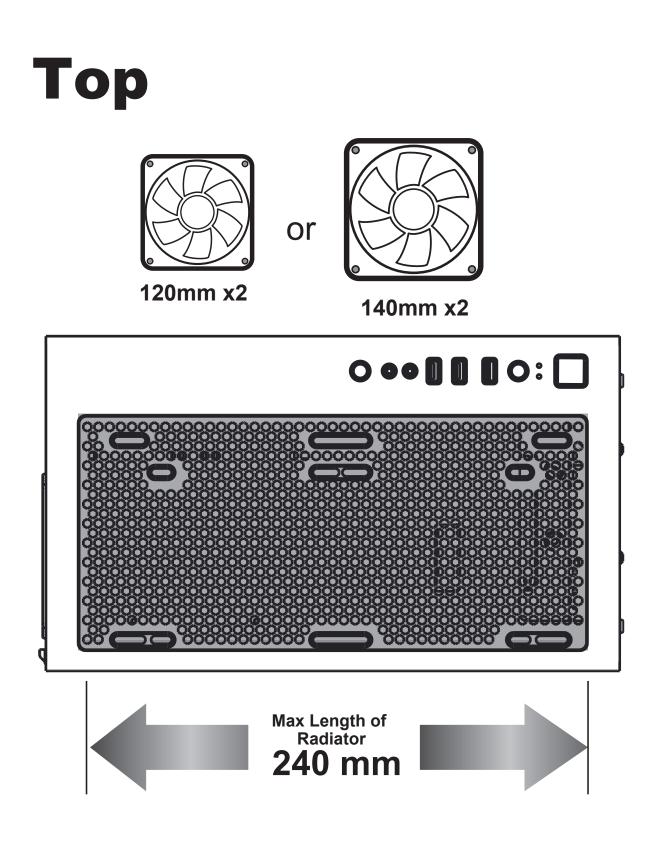


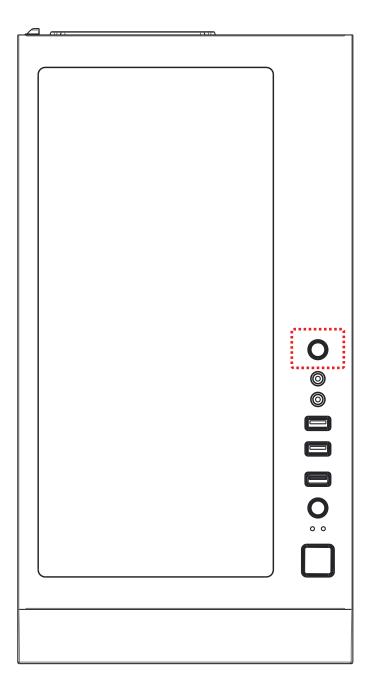

- \* To control the front panel ARGB lighting modes, press the LED button to cycle through 13 RGB lighting modes.
- \* Hold the LED button for 3 seconds to switch the RGB control function between motherboard RGB software and LED button.
- \* To synchronize all addressable RGB light devices, it needs to be switched to be controlled only by the motherboard.

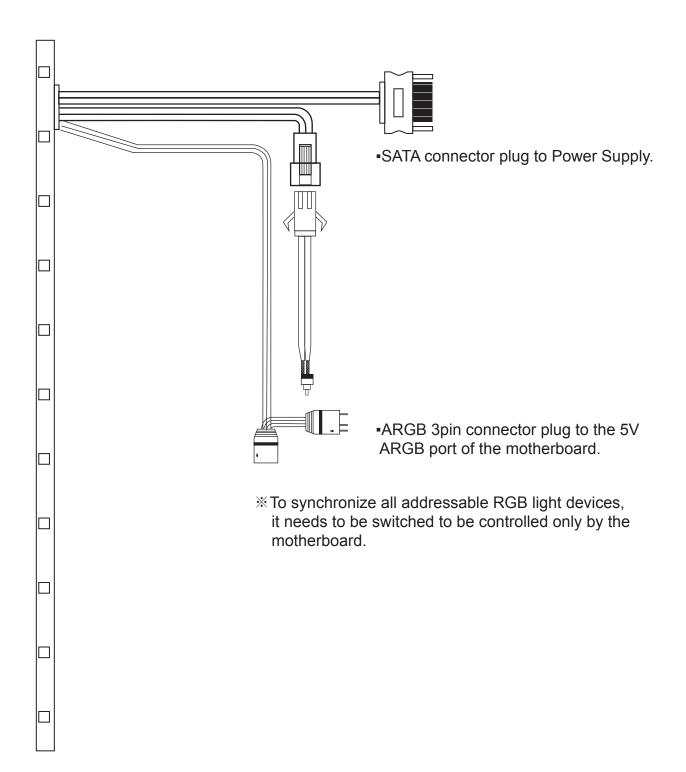

## Fan Installation (2025Version)

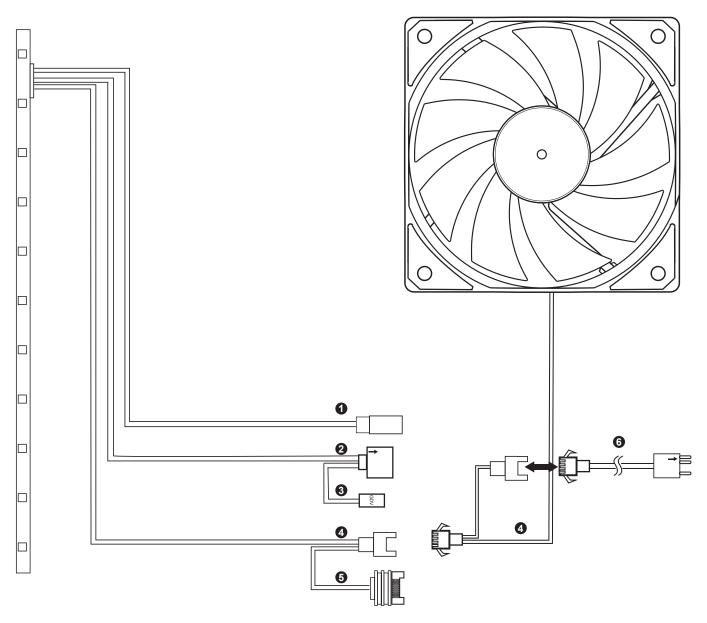

	CONNECTOR	CONNECTION
1	Reset S/W (2pin)	LED Button
2	ARGB LED 5V (3pin)	Motherboard: MSI™, ASUS™ and ASROCK™
3	ARGB LED 5V (VDG)	Motherboard: Gigabyte™
4	Fan Connector	The master Fan connect to the sub-fan
5	SATA	Power Supply
6	Sm4p to ARGB(3pin) cable	Other 5V/3pin ARGB devices

% Press the LED button to cycle through different RGB lighting modes, controlled by the LED button.

