

Model Number ► CSAZ-802/CSAZ-802F

www.arzzatek.com

Installation Instructions


- 1. Specifications
- 2. Chassis Parts
- 3. Designed Case Stand Installation
- 4. Control Panel Functions / PSU Installation
- 5. 3.5"/2.5" HDD Installation
- 6. Cooling System Installation
- 7. AZZA Hurricane II Digital RGB Fan Installation For Motherboard
- 8. RF Remote

Specifications

Model Name	Cube 802
Model Number	CSAZ-802/CSAZ-802F
Specifications	
Туре	ATX \ ITX Full Tower
Color	Black(exterior)/black(interior)
Side Panel Window	Left Right Top side of panel: Tempered Glass With Rubber Mounts
Max CPU Cooler Height	UP to 165mm
Max Video Card Length	Up to 320mm long Video card
Power Supply	Not Included
Motherboard Compatibility	ATX · Micro ATX · Mini ITX
Expansion	•
External 5.25" Drive Bays	0
Internal 2.5" Drive Bays	Up to 2
Internal 3.5" Drive Bays	Up to 1
Expansion Slots	7
Light Effects	
Digital RGB Light Effects (both variants come with digital RGB light strips)	All digital RGB light strips are controlled by RF remote. For model CSAZ-802 up to 5 digital RGB fans can be controlled by the motherboard. For model CSAZ-802F, please plug all digital RGB fans into an RGB SV connector on a WS2812B-compliant motherboard. The digital RGB fans can then be controlled using the motherboard's native lighting control software. If you do not have a WS2812B-compliant motherboard that supports digital RIghts, then you can connect the digital RGB fans into the included RF receive instead, and control them using the included RF controller. To prevent the connector on a WS2812B motherboard or the RF receiver for shorting out, please do not daisy-chain more than 5 digital RGB fans togethe
Physical Specifications Metal Chassis dimensions(HxWxD)	350x350x350mm / 13.8x13.8x13.8 inches
Dimension with Case Stand(HxWxD)	593x500x514mm / 23.3x19.7x20.2 inches
1 /	
Weight	13.8kg /30.4lbs
Features	
Tempered Glass on Three Sides Window	High-quality tempered glass side window allows for clear visuals to inner components
Available Fan Ports	4x120mm ports in the front (4xHurricane II Digital RGB Fan included for model CSAZ-802F only) 1x120mm port in the rear (1xHurricane II Digital RGB Fan included for model CSAZ-802F only)
Water Cooling	Supports radiators up to 240mm in the Front
Isolated Chamber	Dual-chamber design, Power Supply is housed in one of the chamber bottom preventing its heat from affecting other components
Easy Installation Cooler	A pre-cut hole for easy installation of CPU Cooler, eliminating the need to remove the motherboard
Accessories	1x RF Connector for model CSAZ-802 2x RF Connectors for model CSAZ-802F 1x RF Remote Controller 1x Designed Case Stand 1x Fan Metal Protection Net Grill


**PWM Fan:The model comes with PWM fans and will run at top speed unless connected to a motherboard or controller.

Chassis Parts





1	Tempered glass front panel
2	Tempered glass top panel x2
3	Designed case stand
4	Light cover ×3
5	Digital RGB strip ×3
6	LED Lens ×3
7	PCI slot cover x7
8	12cm Fan metal protection net grill

Designed Case Stand Installation

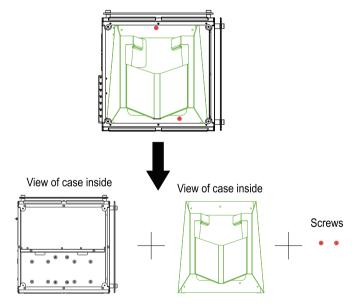

Control Panel Functions/PSU Installation







Power SW button

AZZA

3.5 "/ 2.5" HDD Installation 2.5" SSD



■ Supports up to 320mm long video cards.




■ Supports 2.5" SSD x 2 (**△ ⑤**)

■ Supports 3.5" HDD x 1(**⑤**)

Install the 2.5" SDD before assembling the motherboard.


Cooling System Installation



Install the fan between the chassis and glass panel.

120mm x4

Back




Install the radiator at the chassis inside.

0 0 0 0 RGB Motherboard +12V R SYS_FAN_ 1 ■ ■ Digital RGB 0 0 +5\/ Data 3 No Pin 4 RGB1 All lighting modes are controlled Digital RGB by motherboard software. Expansion Digital RGB

AZZA Hurricane II Digital RGB Fan Installation For Motherboard

Parallel Connection ("daisy-chaining")



CAUTION

If you do not have a motherboard that is compatible with digital RGB, then you can opt to use the included RF remote and receiver.


The addressable RGB fan has a 3-pin connector (4 holes). Please ensure that you are connecting the 3-pin connector

on the fan to the 3-pin RGB header on the motherboard or RF Remote connector.

Do not plug it into the 4-pin header, as the incompatible voltage will fry the fan. The 3-pin connector on the fan to the 4-pin header, as the incompatible voltage will fry the fan. The 3-pin connector on the fan still has 4 holes, but the 4th hole is intentionally blocked, for this reason, so please do not try to force it!

Our digital RGB devices are WS2812B-compliant. Each fan contains 10 digital/addressable LED diodes. The WS2812B standard supports up to 60 diodes at the maximum for a single header, so please do not daisy-chain more than 5 digital RGB fans together.

RF Remote (Model Number: RF-DRGB-I366)

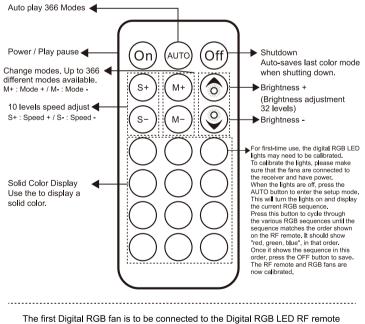

in the chassis, while the rest of them can be daisy chained to the first one with their own male and female plugs.

